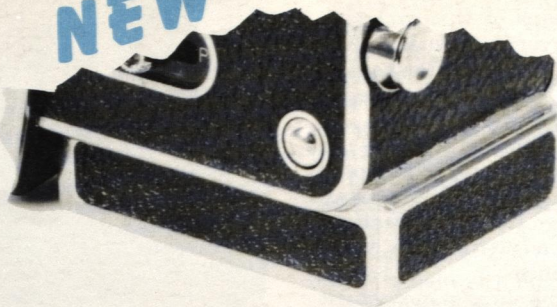


NEW

LIGHT METER FOR H CAMERAS

The Bolex H exposure meter is manufactured by Gossen expressly for Paillard. It is a Cadmium Sulphide photo resistor type using Mallory battery PX-13. Designed to measure both reflected and incident light, the Bolex exposure meter fits into a shoe with which late model Bolex cameras are equipped. This shoe can also be installed on other models. Measuring angle is 12°. Sensitivity ratings of meter is 6 to 1600 ASA at camera speeds from 12 to 64 fps and it can be adjusted to different Variable Shutter settings.

NEW

16MM CAMERAS WITH BUILT-IN BASE

The new model 16mm cameras, the Bolex H-16 Rex-3 and the Bolex H-16 M-3 now come equipped with a built-in base. It is thus no longer necessary to use an attachment to stand the equipment on a flat surface. At the same time the new base serves for easy mounting of the Bolex Matte Box.

NEW

MACRO-SWITAR 50MM TELE-LENS

An exciting new telephoto lens, the 50mm f/1.4 Rx Macro-Switar has been introduced for use with Bolex H-16 Reflex cameras. Its new features include a pre-set diaphragm control lever and as its name suggests a macro focusing device which permits close-up filming without the help of extension tubes from 15" to infinity.


PAN CINOR 85-2 ZOOM LENS

The Pan Cinor 85-2 Zoom Lens, manufactured by Som Berthiot of Paris, France, comes with a new coincident image rangefinder built into its reflex viewfinder. The brightness of the viewing image does not change when stopping down the lens diaphragm and is, therefore, ideal in all lighting and subject conditions including sports. Maximum aperture f/2, minimum aperture f/16. Focuses down to 6' (2 1/2' with close-up lens No. 4). Zoom range is 17 to 85mm (5:1 zoom ratio). Filter size: Series VIII. Available in Standard C mount for all Bolex H and other C mount cameras and in a special version for Auricon cameras.

**NEW**

ALUMINUM CARRYING CASE

This case is designed to withstand the most rugged use and at the same time to protect your valuable Bolex equipment. The case is water-tight and because it is also strong enough to stand on, it can serve as a platform from which to shoot. It accepts all H cameras equipped with regular or zoom lenses (except the Angenieux 120 w/VF if mounted on cameras of the H-16M, T or S series). The aluminum case can serve to store the batteries which makes it practical to use with Unimotor driven cameras. Size: 19 1/2" long x 10" wide x 12 1/2" high

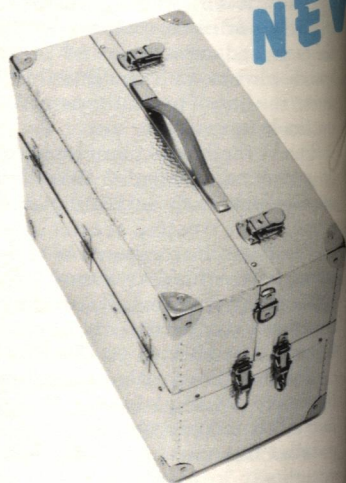**NEW**

ANGENIEUX 120 w/VIEWFINDER

The Angenieux 120 with Viewfinder is designed for "C" mount cameras and is recommended for use with the H-16T, H-16S, H-16M, and H-16M-3. The viewfinder of this lens has a center ground glass for focusing. Each lens is equipped with a sunshade. Zooming range from 12 to 120mm (10:1 ratio) providing a field of view from 6° to 56°. Fast zooms are made with a short 1" zoom handle while a rotating geared hand-crank is used for slow zooms. Maximum aperture f/2.2, minimum aperture f/22. Minimum focusing distance 5' (26" with close-up lens #2). Weight 1 lb. 14 oz. Haze filters and two close-up lenses available separately. Filter size: Series IX

NEW